


## DESICCANT DEHUMIDIFIER ADT-31

It has high dehumidification ability and low energy consumption. The unit has been designed according to Ecodesign directives. Energy efficiency is at maximum level with high efficiency fans, proportional capacity control and high efficiency rotor.



### Specifications

- F7 class air filter
- Stainless surface
- Washable silica gel rotor
- Easy to maintain
- Self-regulating heater

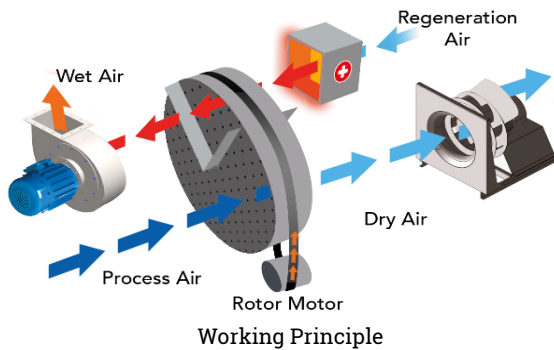

<b>Model</b>	ADT-31
<b>Capacity*</b>	3,0 kg/h
<b>Process Section</b>	
<b>Airflow**</b>	500 m <sup>3</sup> /h
<b>Pressure (Static)</b>	200 Pa
<b>Filter</b>	F7
<b>Regeneration Section</b>	
<b>Airflow**</b>	150 m <sup>3</sup> /h
<b>Pressure (Static)</b>	200 Pa
<b>Filter</b>	F7
<b>Heater Power***</b>	5,0 kW
<b>Total Power</b>	6,5 kW
<b>Weight</b>	50 kg

\*Calculated capacity for 20°C @ 60% RH conditions

\*\*Air conditions with a density of 1.20 kg/m<sup>3</sup>

\*\*\* Maximum installed power of unit with electric heater

